


Angle Head – Shut Off

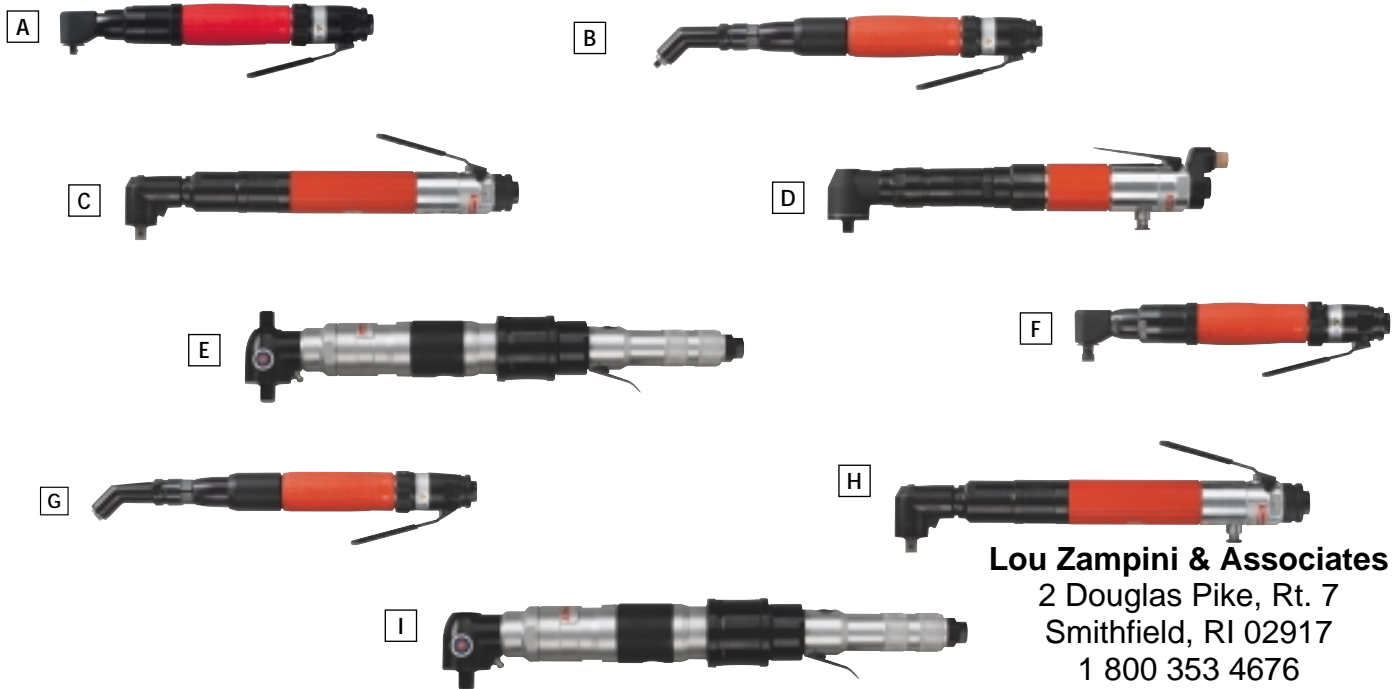

Lou Zampini & Associates
 2 Douglas Pike, Rt. 7
 Smithfield, RI 02917
 1 800 353 4676
 FAX 1 401 679 0165

TWO WAY


PICTURE REF	TOOL TYPE	PART NUMBER	FREE SPEED	OUTPUT	TORQUE RANGE	FITTED SPRING	LENGTH	WEIGHT	AIR FLOW	AIR HOSE BORE	AIR INLET ⁽¹⁾	SOUND LEVEL	VIBRATION
			r/min	hex	Nm	Nm	mm	kg	l/s	mm	BSP	dB(A)	ms ⁻²
A	SC021-L2000-S90A4S	1459154	2000	1/4" sq	0.4-2.1	0.4-0.9	275	0.84	6.5	6	1/8"	73	<2.5
A	SC021-L1400-S90A4S	1459144	1400	1/4" sq	0.4-2.1	0.6-2.1	275	0.84	6.5	6	1/8"	73	<2.5
A	SC043-L950-S90A4S	1459134	950	1/4" sq	0.4-4.3	0.9-4.3	275	0.84	6.5	6	1/8"	73	<2.5
A	SC047-L500-S90A4S	1459124	500	1/4" sq	0.4-4.7	0.9-4.7	275	0.84	6.5	6	1/8"	73	<2.5
B	SC021-L2200-S45A4S	1459574	2200	1/4" sq	0.4-2.1	0.4-0.9	339	0.85	6.5	6	1/8"	73	<2.5
B	SC021-L1500-S45A4S	1459584	1500	1/4" sq	0.4-2.1	0.6-2.1	339	0.85	6.5	6	1/8"	73	<2.5
B	SC043-L1050-S45A4S	1459594	1050	1/4" sq	0.4-4.3	0.9-4.3	339	0.85	6.5	6	1/8"	73	<2.5
B	SC047-L520-S45A4S	1459604	520	1/4" sq	0.4-4.7	0.9-4.7	339	0.85	6.5	6	1/8"	73	<2.5
C	2D489-LX-1100	1378574	1100	3/8" sq	1.9-5.8	1.9-5.8	324	1.2	8.2	10	1/4"	73	<2.5
C	2D489-LX-650	1378654	650	3/8" sq	2.4-8.8	2.4-8.8	345	1.3	8.2	10	1/4"	73	<2.5
C	2D489-LX-400	1378734	400	3/8" sq	3.5-14.1	3.5-14.1	376	1.7	8.2	10	1/4"	73	<2.5
C	2D489-LX-260	1378814	260	3/8" sq	7.3-21.0	7.3-21.0	376	1.7	8.2	10	1/4"	73	<2.5
C	2D489-LX-160	1389184	160	3/8" sq	7.3-28.0	7.3-28.0	376	1.7	8.2	10	1/4"	73	<2.5
D	2F489-LX-470	1462324	470	3/8" sq	7.0-17.0	7.0-17.0	350	2.1	9.4	10	1/4"	78	<2.5
D	2F489-LX-300	1462334	300	3/8" sq	9.0-25.0	9.0-25.0	362	2.5	9.4	10	1/4"	78	<2.5
E	4H489-N-750	1301984	750	3/8" sq	12.2-36.0	12.2-36.0	435	3.1	16.5	12	3/8"	84	<2.5
E	4H489-N-480	1301804	480	1/2" sq	25.5-47.0	25.5-47.0	459	3.1	16.5	12	3/8"	84	<2.5
F	SC021-L2000-S90A4H	1459074	2000	1/4" hex	0.4-2.1	0.4-0.9	275	0.84	6.5	6	1/8"	73	<2.5
F	SC021-L1400-S90A4H	1459064	1400	1/4" hex	0.4-2.1	0.6-2.1	275	0.84	6.5	6	1/8"	73	<2.5
F	SC043-L950-S90A4H	1459054	950	1/4" hex	0.4-4.3	0.9-4.3	275	0.84	6.5	6	1/8"	73	<2.5
F	SC047-L500-S90A4H	1459044	500	1/4" hex	0.4-4.7	0.9-4.7	275	0.84	6.5	6	1/8"	73	<2.5
G	SC021-L2200-S45A4H	1459484	2200	1/4" hex	0.4-2.1	0.4-0.9	339	0.85	6.5	6	1/8"	73	<2.5
G	SC021-L1500-S45A4H	1459494	1500	1/4" hex	0.4-2.1	0.6-2.1	339	0.85	6.5	6	1/8"	73	<2.5
G	SC043-L1050-S45A4H	1459504	1050	1/4" hex	0.4-4.3	0.9-4.3	339	0.85	6.5	6	1/8"	73	<2.5
G	SC047-L520-S45A4H	1459514	520	1/4" hex	0.4-4.7	0.9-4.7	339	0.85	6.5	6	1/8"	73	<2.5

ONE WAY

PICTURE REF	TOOL TYPE	PART NUMBER	FREE SPEED	OUTPUT	TORQUE RANGE	FITTED SPRING	LENGTH	WEIGHT	AIR FLOW	AIR HOSE BORE	AIR INLET ⁽¹⁾	SOUND LEVEL	VIBRATION
			r/min	hex	Nm	Nm	mm	kg	l/s	mm	BSP	dB(A)	ms ⁻²
H	D489-LX-300	1378494	300	3/8"	7.9-22.0	7.9-22.0	366	1.7	8.8	10	1/4"	77	<2.5
I	H489-N-750	1301724	750	3/8"	12.2-36.0	12.2-36.0	435	2.3	16.5	12	3/8"	84	<2.5
I	H489-N-480	1301644	480	1/2"	25.5-47.0	25.5-47.0	459	3.1	16.5	12	3/8"	84	<2.5
I	H489-N-200	1301564	200	1/2"	30.1-103.0	30.1-103.0	459	3.1	16.5	12	3/8"	84	<2.5

⁽¹⁾ NPT optional

Angle Head – Non Shut Off and Direct Drive

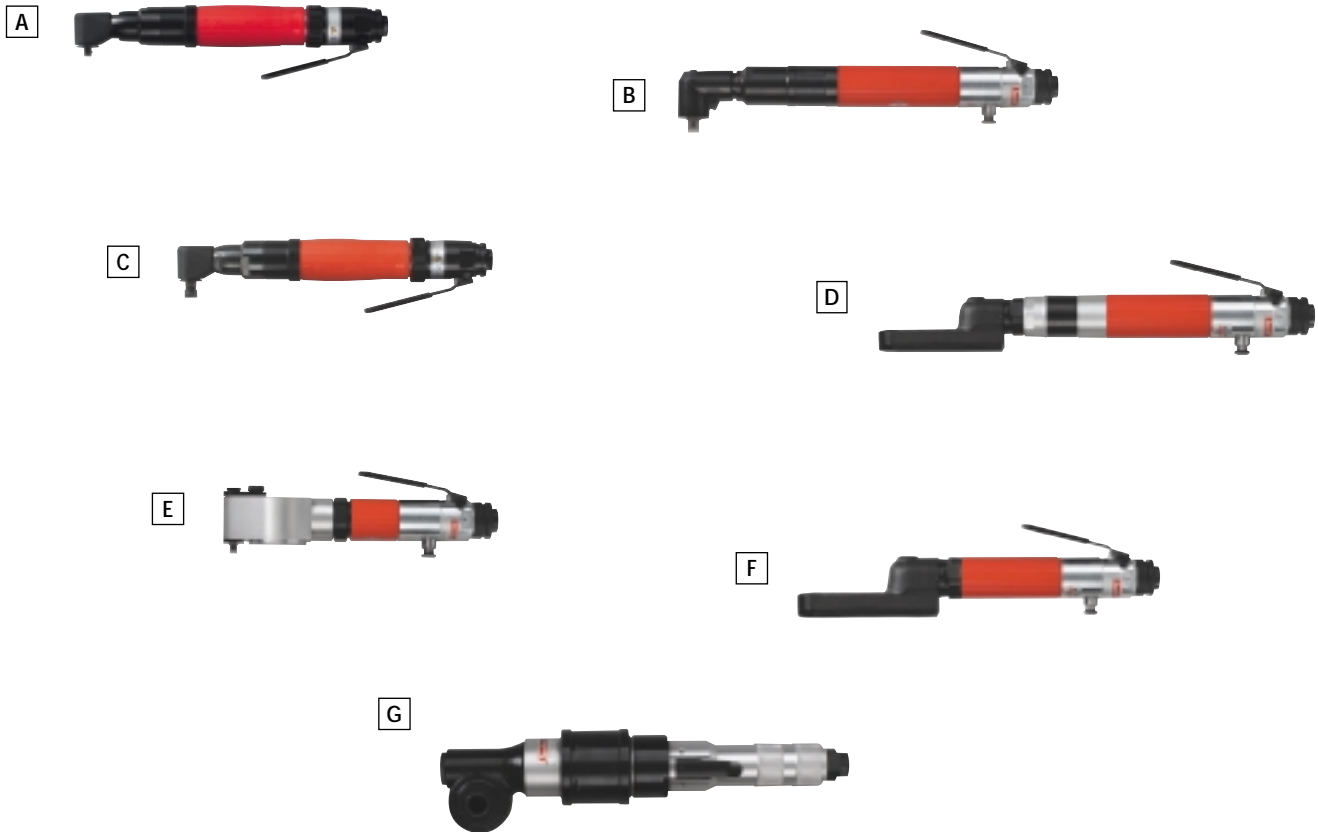

NON SHUT OFF

PICTURE REF	TOOL TYPE	PART NUMBER	FREE SPEED	OUTPUT	TORQUE RANGE	FITTED SPRING	LENGTH	WEIGHT	AIR FLOW	AIR HOSE BORE	AIR INLET ⁽¹⁾	SOUND LEVEL	VIBRATION
			r/min	hex	Nm	Nm	mm	kg	l/s	mm	BSP	dB(A)	ms ⁻²
A	SC024-L2000-R90A4S	1459194	2000	1/4" sq	0.5-2.4	0.5-1.8	275	0.84	6.5	6	1/8"	73	3.7-8.2
A	SC022-L1400-R90A4S	1459184	1400	1/4" sq	0.5-2.2	0.8-2.2	275	0.84	6.5	6	1/8"	73	2.7-7.2
A	SC044-L950-R90A4S	1459174	950	1/4" sq	0.4-4.4	1.3-4.4	275	0.84	6.5	6	1/8"	73	3.2-9.9
A	SC044-L500-R90A4S	1459164	500	1/4" sq	0.4-4.4	1.0-4.4	275	0.84	6.5	6	1/8"	73	4.5-5.2
B	2D48-LX-400	1387984	400	3/8" sq	7.7-14.4	7.7-14.4	334	1.4	8.5	10	1/4"	73	1.3-3.0
B	2D48-LX-260	1388034	260	3/8" sq	7.7-14.4	7.7-14.4	334	1.4	8.5	10	1/4"	73	1.7-3.1
C	SC024-L2000-R90A4H	1459114	2000	1/4" hex	0.5-2.4	0.5-1.8	275	0.84	6.5	6	1/8"	73	3.7-8.2
C	SC022-L1400-R90A4H	1459104	1400	1/4" hex	0.5-2.2	0.8-2.2	275	0.84	6.5	6	1/8"	73	2.7-7.2
C	SC044-L950-R90A4H	1459094	950	1/4" hex	0.4-4.4	1.3-4.4	275	0.84	6.5	6	1/8"	73	3.2-9.9
C	SC044-L500-R90A4H	1459084	500	1/4" hex	0.4-4.4	1.0-4.4	275	0.84	6.5	6	1/8"	73	4.5-5.2
D	2D4872-LX-550	1388614	550	0.445" hex	3.6-6.8	3.6-6.8	382	1.1	8.5	10	1/4"	73	4.1-5.2

DIRECT DRIVE

PICTURE REF	TOOL TYPE	PART NUMBER	FREE SPEED	OUTPUT	TORQUE RANGE	LENGTH	WEIGHT	AIR FLOW	AIR HOSE BORE	AIR INLET ⁽¹⁾	SOUND LEVEL	VIBRATION
			r/min	hex	Nm	mm	kg	l/s	mm	BSP	dB(A)	ms ⁻²
E	2D4201-LX-500	1344854	500	1/4" sq	1.5-15.4	238	1.1	8	10	1/4"	77	<2.5
F	2D472-LX-550	1388534	550	0.445" hex	1.2-12.6	326	1.0	8.5	10	1/4"	73	<2.5
G	H410-N-500	1302374	500	0.525" hex	3-30	319	1.7	17.9	12	3/8"	82	<2.5
G	H410-N-350	1302454	350	0.525" hex	4.5-45	319	1.7	17.9	12	3/8"	82	<2.5
G	H410-N-150	1302534	150	0.525" hex	8-80	358	2.0	17.9	12	3/8"	82	<2.5
G	H410-N-90	1302614	90	0.525" hex	10-105	358	2.0	13.2	12	3/8"	82	<2.5
G	H410-N-60	1302794	60	0.525" hex	10-105	358	2.0	13.2	12	3/8"	82	<2.5

Pressure on H410-N-90 and 60 must be adjusted so that tool torque output does not exceed 105Nm

⁽¹⁾ NPT optional