

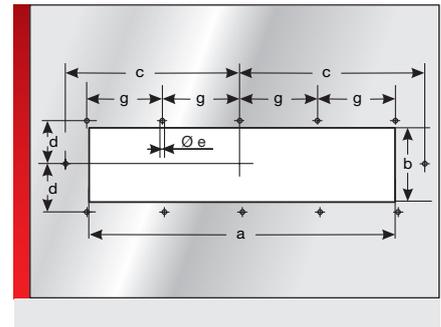


# Cable entry plate, type KDP metal cablequick®, rectangular

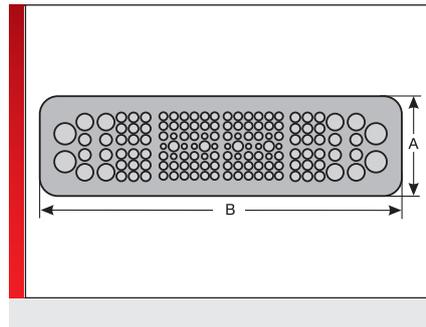

## metal cablequick® Type 149 (149x534 mm)

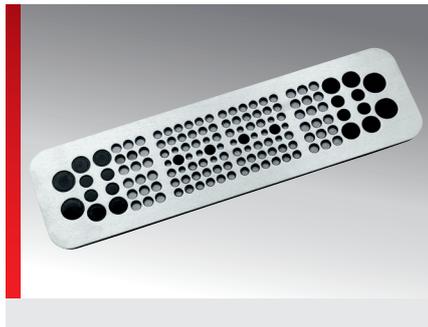

Cable entry plate, type KDP metal cablequick®, rectangular

### PRODUCT INFORMATION

Efficient connection technology for terminal boxes, control cabinets for tool-free introduction of actuators, sensors, measuring and control instrumentation, optoelectronic, pneumatic lines and drive technology into a control panel. KDPs of product group 149 can be fitted directly into the standard cut-outs of Rittal cabinets.

The stainless steel version is particularly sui-

table for application in the food and chemical areas. Integrated threaded bolts mean that no screws are visible from outside. Mounting set included in delivery.

- V4A : 1.4571
- ALU : 3.3535
- ST : 1.0037
- Rittal cut-out 5

### SPECIFICATIONS

-  NBR / EPDM Seal:
-  IP 65
-  -30 – 90 °C





Type	Order No.	Colour	No. Openings	Openings No. Ø mm	Pack qty.
KDP 149/140 ALU	87663095	RAL 7035	140	16x 3.50 – 6.20	1
				64x 4.50 – 8.50	
				36x 6.00 – 10.00	
				4x 8.00 – 12.00	
				8x 9.00 – 14.00	
KDP 149/292 ALU	87663079	RAL 7035	292	8x 14.00 – 18.00	1
				4x 18.00 – 25.00	
				250x 3.50 – 6.20	
				32x 6.00 – 10.00	
				8x 8.00 – 12.00	
KDP 149/46 ALU	87663064	RAL 7035	46	2x 12.00 – 18.00	1
				8x 6.00 – 10.00	
				16x 10.00 – 14.00	
				18x 12.00 – 18.00	
KDP 149/140 V4A	87663088	Smoothed	140	4x 18.00 – 25.00	1
				16x 3.50 – 6.20	
				64x 4.50 – 8.50	
				36x 6.00 – 10.00	
				4x 8.00 – 12.00	
KDP 149/292 V4A	87663066	Smoothed	292	8x 9.00 – 14.00	1
				8x 14.00 – 18.00	
				250x 3.50 – 6.20	
				32x 6.00 – 10.00	
				8x 8.00 – 12.00	
				2x 12.00 – 18.00	

# Cable entry plate, type KDP metal cablequick®, rectangular



## cablequick® Type 149 (149x534 mm)

Cable entry plate, type KDP metal cablequick®, rectangular

### DIMENSION TABLE

Type	Order No.	A mm	B mm	a mm	b mm	c mm	d mm	e mm	g mm
KDP 149/140 ALU	87663095	149.00	534.00	500.00	115.00	259.00	66.50	5.00	110.00
KDP 149/292 ALU	87663079	149.00	534.00	500.00	115.00	259.00	66.50	5.00	110.00
KDP 149/46 ALU	87663064	149.00	534.00	432.00	102.00	259.00	66.50	4.00	110.00
KDP 149/140 V4A	87663088	149.00	534.00	500.00	115.00	259.00	66.50	5.00	110.00
KDP 149/292 V4A	87663066	149.00	534.00	500.00	115.00	259.00	66.50	5.00	110.00

### MATERIAL PROPERTIES



NBR / EPDM Seal:

### MECHANICAL PROPERTIES



Protection class  
IP 65



Temperature / temperature range  
-30 – 90 °C

### APPROVALS AND OPERATING PERMITS



CSA approval



UR approval

### CONFORMITY



RoHS (EC Directive 2002/95/EC)

# Cable entry plate, type KDP metal cablequick®, rectangular



## cablequick® Type 149 (149x534 mm)

Cable entry plate, type KDP metal cablequick®, rectangular

All details given in our sales material prospectuses and catalogues as well as the information available online are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information with respect to the chemical and physical properties of Murrplastik products as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge.

This does not free the purchaser of carrying out their own inspections and tests in order to determine the suitability of a product for a specific purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.

© Murrplastik Systemtechnik GmbH • proID\_57912~20160420~890287~kdh\_kdp\_m\_149\_534